


DI-208P2-H.265




Key Features

- * 8 -channel input
- * Third-party IP cameras supported with ONVIF conformance
- * Support 2-ch HDMI, 1-ch VGA, HDMI 2 at up to 4K(3840x2160) resolution
- * Up to 12 Megapixels resolution recording
- * Support H.265 / H.264 video formats
- * Accurate retrieval, instant playback
- * Support various VCA detection alarm and VCA search
- * Plug & Play with up to 8 independent PoE network interfaces
- * Support for P2P, UPnP, NTP, DHCP, PPPoE
- * Support for mobile client access

Rear Panel

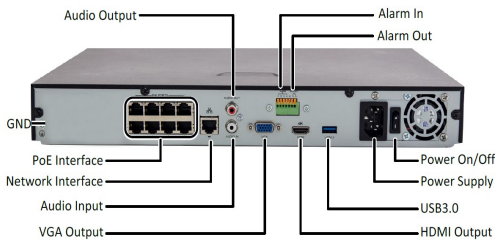

Dimensions

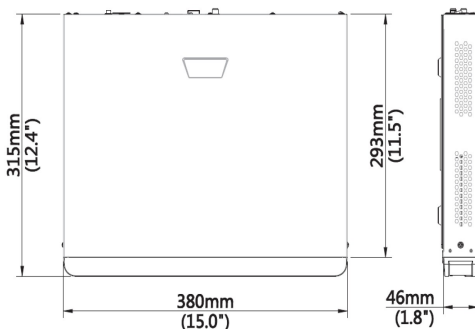

Specification

| | | |
|------------------------------|---|-----------------------|
| Model | | DI-208P2-H.265 |
| Video / Audio Input | | |
| IP Video Input | 8-ch | |
| Two-way Audio Input | 1-ch, RCA | |
| Network | | |
| Incoming Bandwidth | 80Mbps | |
| Outgoing Bandwidth | 160Mbps | |
| Remote Users | 128 | |
| Video / Audio Output | | |
| HDMI / VGA Output | VGA: 1920 x 1080P / 1600 x 1200 / 1280 x 1024 / 1280 x 720 / 1024 x 768 | |
| | HDMI : 4K(3840 x 2160), 1920x 1080 / 1600 x 1200 / 1280 x 1024 / 1280 x 720 | |
| Recording Resolution | 12MP /8MP /6MP /5MP /4MP /3MP /1080p /960p /720p /D1 /2CIF /CIF | |
| Audio Output | 1-ch, RCA | |
| Synchronous Playback | 8-ch | |
| Decoding | | |
| Compression | H.265 / H.264 | |
| Live view/ Playback | 12MP /8MP /6MP /5MP /4MP /3MP /1080p /960p /720p /D1 /2CIF /CIF | |
| Capability | 4 x 12MP@20, 4 x 4K@30, 8 x 4MP @30, 16 x 1080P @30 | |
| Hard Disk | | |
| SATA | 2 SATA interfaces | |
| Capacity | Up to 8TB for each disk | |
| External Interface | | |
| Network Interface | 1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface | |
| USB Interface | Rear panel: 1 x USB3.0 , 2 x USB2.0 | |
| Alarm In | 4-ch | |
| Alarm Out | 1-ch | |
| PoE | | |
| Interface | 8 x PoE network interface | |
| Max Power | Max 30W for single port | |
| | Max 130W in total (16.25W for each) | |
| Supported Standard | IEEE 802.3af / at | |
| General | | |
| Power Supply | 100 ~ 240 V AC | |
| Consumption (with out HDD) | ≤ 20 W | |
| Working Temperature | -10°C ~ + 55°C (+14°F ~ +131°F) | |
| Working Humidity | 10% ~ 90% | |
| Dimensions | 46 mm × 380mm × 315 mm | |
| Weight (with out HDD) | ≤ 2.42Kg | |

* Specification is subject to change without prior notice.