


DI-216P4-H.265




Key Features

- 16-channel input
- Third-party IP cameras supported with ONVIF conformance
- Support 2-ch HDMI, 1-ch VGA, HDMI 2 at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support H.265 / H.264 video formats
- Accurate retrieval, instant playback
- 4 SATA HDDs, Up to 8TB for each HDD
- Support various VCA detection alarm and VCA search
- Support for 12V Power output
- Plug & Play with up to 16 independent PoE network interfaces
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Rear Panel

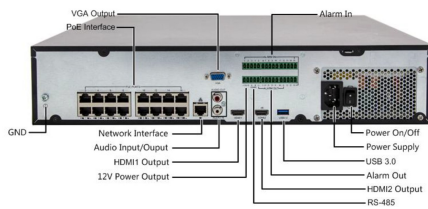

Dimensions

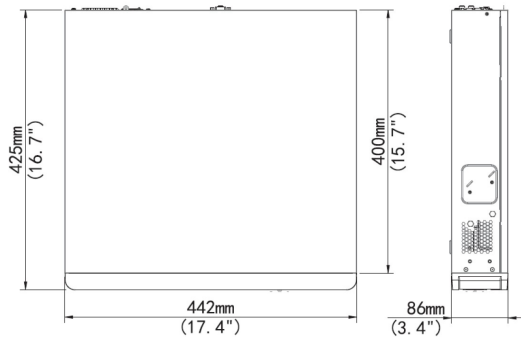

Specification

Model		DI-216P4-H.265
Video / Audio Input		
IP Video Input	16-ch	
Two-way Audio Input	1-ch, RCA	
Network		
Incoming Bandwidth	160Mbps	
Outgoing Bandwidth	320Mbps	
Remote Users	128	
Video / Audio Output		
HDMI / VGA Output	HDMI 1 / VGA: 1920 x 1080P / 1600 x 1200 / 1280 x 1024 / 1280 x 720 / 1024 x 768 HDMI 2 : 4K(3840 x 2160), 1920x 1080 / 1600 x 1200 / 1280 x 1024 / 1280 x 720	
Recording Resolution	12MP /8MP /6MP /5MP /4MP /3MP /1080P /960P /720P /D1 /2CIF /CIF	
Audio Output	1-ch, RCA	
Synchronous Playback	16-ch	
Decoding		
Compression	H.265 / H.264	
Live view/ Playback	12MP /8MP /6MP /5MP /4MP /3MP /1080p /960p /720p /D1 /2CIF /CIF	
Capability	4 x 12MP@20, 4 x 4K@30, 8 x 4MP @20, 16 x 1080P @25, 32 x 720P @25	
Hard Disk		
SATA	4 SATA interfaces	
Capacity	Up to 8TB for each disk	
External Interface		
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface	
Serial Interface	1 x RS485	
USB Interface	Rear panel: 1 x USB3.0 , 2 x USB2.0	
Alarm In	16-ch	
Alarm Out	4-ch	
Power Output	12 VDC	
PoE		
Interface	16 independent 100Mbps PoE network interfaces	
Max Power	Max 30W for single port Max 200W in total (12.5W for each)	
Supported Standard	IEEE 802.3af / at	
General		
Power Supply	100 ~ 240 V AC	
Consumption (with out HDD)	≤ 20 W	
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)	
Working Humidity	10% ~ 90%	
Dimensions	86 mm × 442mm × 425 mm	
Weight (with out HDD)	≤ 5.24Kg	

* Specification is subject to change without prior notice.