


DI-364-HW



Features

- * 64 -channel input
- * Third-party IP cameras supported with ONVIF conformance
- * Support 2-ch HDMI, 1-ch VGA, HDMI 2 at up to 4K(3840x2160) resolution
- * Up to 12 Megapixels resolution recording
- * Support H.265/H.264 video formats
- * Accurate retrieval, instant playback
- * Support HDD hot swap with RAID 0,1,5,6,10 storage scheme configurable
- * 8 SATA HDDs, Up to 8TB for each disk
- * Support various VCA detection alarm and VCA search
- * Support N + 1 Hot spare
- * Support for 12V Power output
- * Support for P2P, UPnP, NTP, DHCP, PPPoE
- * Support for mobile client access

Dimensions

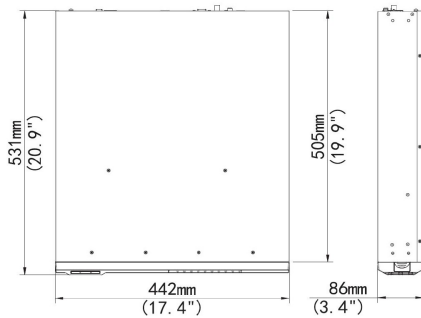

Specification

Model	DI-364-HW
Video / Audio Input	
IP Video Input	64-ch
Two-way Audio Input	1-ch, RCA
Network	
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Video / Audio Output	
HDMI / VGA Output	VGA: 1920x1080p , 1600x1200 , 1280x1024 , 1280x720 , 1024x768 HDMI:4K (3840x2160) , 1920x1080p , 1600x1200 , 1280x1024
Recording Resolution	8MP /6MP /5MP /4MP /3MP /1080p /960p /720p /D1 /2CIF /CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Decoding	
Compression	H.265 / H.264
Live view/ Playback	8MP /6MP /5MP /4MP /3MP /1080p /960p /720p /D1 /2CIF /CIF
Capability	4 x 12MP@20, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P @30
Hard Disk	
SATA	8 SATA interfaces
Capacity	up to 8TB for each disk
Disk Array	
Array Type	RAID 0,1,5,6,10
External Interface	
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
Serial Interface	1 x RS232, 1 x RS485
USB Interface	Rear panel: 1 x USB3.0 , 2 x USB2.0
Alarm In	16-ch
Alarm Out	4-ch
General	
Power Supply	100 ~ 240 V AC
Consumption (with out HDD)	≤ 20 W
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)
Working Humidity	10% ~ 90%
Dimensions	86 mm × 442mm × 531 mm
Weight (with out HDD)	≤ 5.13Kg

* Specification is subject to change without prior notice.

