


### VTC-B21FC

#### 2MP Full-Color Bullet Network Camera



- 2MP ( 1920 × 1080 ) H.265 full real time coding
- Max. resolution: 1920 × 1080
- 30~ 40m supplement light range
- 24/7 full color imaging
- 3D DNR, HWDR, HLC and BLC
- ROI coding
- Built-in micro SD card slot, up to 256GB
- DC12V/PoE power supply
- IP67 ingress protection
- Support three streams
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent Analytics

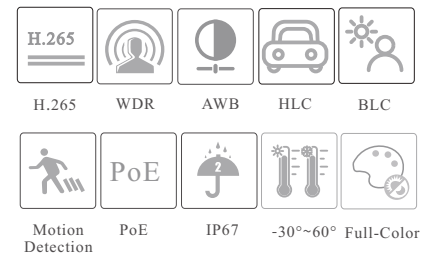


### SPECIFICATIONS

Specifications	Model	VTC-B21FC
<b>Camera</b>		
Image Sensor		1 / 2.8 "CMOS
Image Size		1920 × 1080
Electronic Shutter		1 s ~ 1 / 100000 s
Iris Type		Fixed Iris
Min. Illumination		0.002 lux@ F1.0, AGC ON; 0 lux with LED ON
S/N Ratio		≥50dB
Lens		2.8~12 mm @F1.4, H.FoV: 105.4~34°; V.FoV:54.8~19.1°; D.FoV:126~39°
Focus		Motorized
Lens Mount		Φ14
Wide Dynamic Range		120dB
BLC		Yes
HLC		Yes
Defog		No
Digital NR		3D DNR
Angle Adjustment		Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
<b>Image</b>		
Video Compression		Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard		Baseline Profile/Main Profile/High Profile
Resolution		1080P (1920 × 1080), 720P (1280 × 720), D1, 640 × 480, CIF, 480 × 240
Main Stream		60Hz: 1080P(1~30fps)/720P(1~30fps); 50Hz: 1080P(1~25fps)/720P(1~25fps)
Sub Stream		60Hz : D1/CIF/640 × 480 (1~30fps); 50Hz: D1/CIF/640 × 480 (1~25fps)
Third Stream		60Hz : D1/CIF/480×240 (1~30fps); 50Hz: D1/CIF/480×240 (1~25fps)
Bit Rate		128 Kbps ~ 6 Mbps
Bit Rate Type		VBR / CBR
Audio Compression		G711A / U
Image Settings		ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Flip, Image Mirror, NR, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
<b>Interfaces</b>		
Network		RJ 45
Video Output		NO
Audio		1CH audio input; 1CH built-in MIC
Storage		Built-in micro SD card slot, up to 256GB
Reset		Yes
<b>Functions</b>		
Remote Monitoring		Web Browser/ NVMS2.0/NVR/mobile APP
Web Browser		IE(plugin-in required)/Google Chrome/Edge/Firefox/Safari
Online Connection		Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol		UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPS, HTTP, QoS
Interface Protocol		ONVIF
Storage		Network remote storage; micro SD card storage
Intelligent Analytics		Video exception detection, intrusion detection and line crossing detection, abandoned/missing object detection
Smart Alarm		Motion detection, SD card error, SD card full
General function		Watermark, IP address filtering, video mask, heartbeat, illegal login lock, corridor pattern
PoE		Yes (IEEE802.3af)
Supplement light Range		IR range: 30 ~ 40 m White light range: 30 ~ 40 m
Ingress Protection		IP 67

### DORI Distance

Lens	Detect	Observe	Recognize	Identify
2.8mm	41.05m(134.67ft)	16.42m(53.87ft)	8.21m(26.93ft)	4.10m(13.45ft)
3.6mm	51.01m(167.35ft)	20.40m(66.92ft)	10.20m(33.46ft)	5.10m(16.73ft)
2.8~12mm(W)	41.67m(136.71ft)	16.66m(54.65ft)	8.33m(27.32ft)	4.16m(13.64ft)
2.8~12mm(T)	128.38m(421.19ft)	51.35m(168.47ft)	25.67m(84.21ft)	12.83m(42.09ft)
<b>Others</b>				
Power Supply	DC12V/PoE			
Power Consumption	< 10W			
Storage Conditions	- 30 °C ~ 65 °C (-22 °F ~ 149 °F), Humidity: less than 95 % (non-condensing)			
Operating Conditions	- 30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity: less than 95 % (non-condensing)			
Dimensions (mm)	217.7 × 80.5 × 80.3			
Weight (net)	Approx. 0.64KG			
Installation	Ceiling mounting; wall mounting			
Certificate	CE, FCC			
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)			

### DIMENSIONS

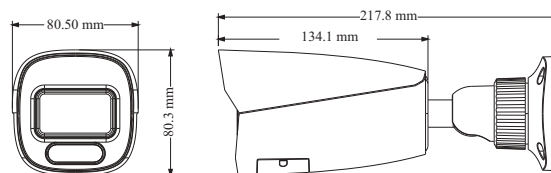

### AVAILABLE ACCESSORIES



### AVAILABLE MODEL

Available Model	VTC-B21FC	Motorized lens