




VT-AH1632

VT-AH1632 is designed to be distribute 16 video signal to 32 video output, which is built in 19" standard 1U rack mounting cabinet. The application is perfect for larger industry CCTV installation where need multiple monitoring station. They are suitable for different floor in a building or different electrical field.

Features:

- 16 Video input to 32 video output.
- Support HD-TVI, AHD, HDCVI, 960H, NTSC, PAL video signal.
- Support high resolution up to 4K/1080P without any video loss.
- Built in blue LED for video signal on/off detection.
- Video input, output, power input built in TVS protection.
- Power input support: 9-24V DC.

Installation View:

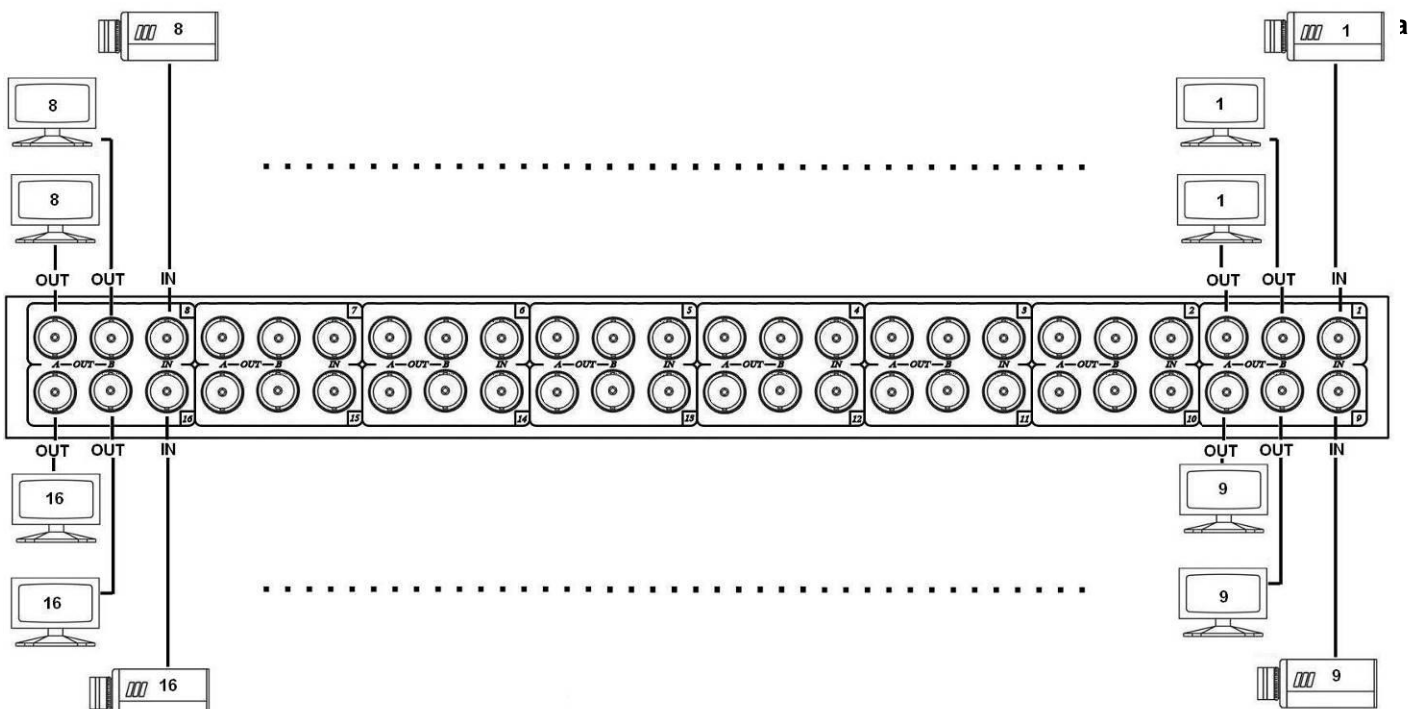

Cable & Transmission Distance :

Link cable recommend use high quality 75ohm coaxial RG59/RG6U cable. The transmission distance will be affected by different quality of Camera, DVR and BNC connector, cable, installation...etc.

LED Indication:

GREEN :Power ON/OFF
BLUE :Video ON/OFF

Caution :

1. This device not support HD camera control data signal transmission.
2. The signal LED light may have different brightness or flash status based on different video signal

Specifications:

ITEM NO.	VT-AH1632
Video Input Channel	BNC x 16, 75Ω, 1Vpp
Video Output Channel	BNC x 32, 75Ω, 1Vpp
LED Indication	1 Power LED (GREEN), 16 Signal LED (BLUE)
Video Bandwidth	100MHz 0.1dB Gain Flatness
Power Supply	DC12V 1Amp
Power Consumption	700mA
Temperature	Operation: 0 to 55°C, Storage: -20 to 85°C, Humidity: up to 95%
Dimensions mm	483 x 105.5 x 44
Weight g	2050

